




Rotary Gear Pumps
SINCE : 1993

Series : FT

ROTARY GEAR PUMPS

Perfect Solution

for Transfer of Oils, Viscous &
Semi Viscous Liquids

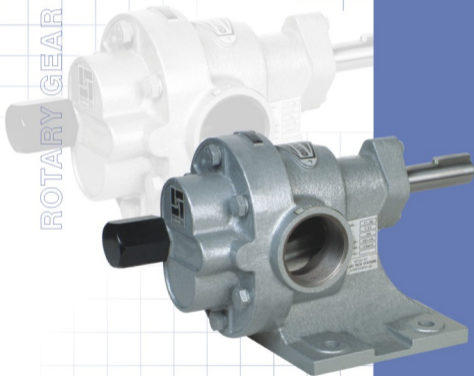

Fluid Tech Systems

Ahmedabad - 382 430. (Guj.) INDIA

*“Let Our
Quality Speak
For Itself”*



ADVANCED TECHNOLOGY FOR PUMPING VISCOUS LIQUIDS



Fluid Tech Systems offers most efficient and economic range of Positive Displacement Rotary Gear Pumps under the brand name **"ROTOFLUID"** having special features like simple & compact design, low noise, high efficiency, easy to maintain, reliable and low cost. **"ROTOFLUID"** Rotary Gear Pumps are ideal for Chemical, Petrochemical, Food, Oil, Steel, Refining, Paints, Dairy, Sugar & Pharmaceutical Industries etc. The Pumps are useful for handling viscous liquids i.e. all kinds of oils, viscous chemicals & food applications etc.

PERFORMANCE CHART

PUMP MODEL	SUCTION & DELIVERY	CAPACITY AT 1440 RPM			RECOMMENDED MOTOR BHP AT DIFFERENTIAL PRESSURE (KG/CM ²) WITH 1500 SSU VISCOSITY										WT. OF (APPROX.) BARE PUMP IN KG.	
		LPM	US GPM	M ³ /hr	Kg./cm ²	1	2	3	4	5	6	7	8	9		10
						KW	HP	KW	HP	KW	HP	KW	HP	KW		HP
FT - 025	½" X ½"	05	1.3	0.3	0.20	0.21	0.22	0.23	0.24	0.25	0.26	0.30	0.32	0.35	1.40	
									0.35				0.50			
FT - 050	½" X ½"	20	5.3	1.2	0.30	0.35	0.40	0.45	0.50	0.55	0.60	0.65	0.70	0.75	2.2	
									0.75				1.0			
FT - 075	¾" X ¾"	30	7.9	1.8	0.43	0.45	0.54	0.62	0.69	0.77	0.85	0.92	1.01	1.09	4.2	
									1.0				1.5			
FT - 100	1" X 1"	50	13.2	3.0	0.4	0.50	0.60	0.75	0.89	1.04	1.17	1.30	1.46	1.59	5.0	
									1.5				2.0			
FT - 125	1¼" X 1¼"	75	19.8	4.5	0.7	1.0	1.2	1.4	1.5	1.9	1.95	2.15	2.35	2.55	8.0	
									2.0				3.0			
FT - 150	1½" X 1½"	110	29.0	6.6	1.0	1.45	1.95	2.10	2.40	2.65	2.95	3.25	3.60	3.75	9.5	
									3.0				5.0			
FT - 200	2" X 2"	225	59.4	13.5	2.0	2.5	3.2	3.75	4.3	4.55	5.6	6.2	6.9	7.11	17.2	
									5.0				7.5			
FT - 250	2½" X 2½"	350	92.5	21.0	4.15	5.2	6.1	7.3	8.2	9.1	10.3	11.2	12.1	12.25	28.5	
									10.0				12.5			
FT - 300	3" X 3"	500	132.0	30.0	4.5	6.6	8.4	9.9	11.1	12.1	13.0	13.9	14.9	15.9	50.0	
									15				20			



MATERIAL OF CONSTRUCTION

STANDARD PARTS

- Body : IS 210 FG 220 C.I. Grade
- Back Cover : IS 210 FG 220 C.I. Grade
- Gears : EN - 8 / EN - 24 H. Nitrided
- Shaft : EN - 19 H.G.
- Bushes : Non Ferrous
- Seal : Neoprene Oil seal / "Z" Pack Teflon

Pressure relief valve will be provided in all models.

DIMENSIONAL DRAWING DETAILS

MODEL	A	B	C	E	F	G	S	T	H	H1	H2	H3	L	M	N	DØ	D1Ø	K	PQ
FT - 025	141	32	63	34	35	60	78	60	54	44.5	79	6	18	3	11	9.52	7	65	¼" B.S.P.
FT - 050	172	46	78	51	40	70	90	70	63	50	90	6	22	4	13.5	12	8	70	½" B.S.P.
FT - 075	215	54	92	63.5	45	85	110	80	80	66	115	8	25	5	16.0	14	10	90	¾" B.S.P.
FT - 100	236	64	105	64.5	50	93	125	95	90	73	128	8	27.5	5	19.5	17	10	86	1" B.S.P.
FT - 125	266	70	113	65	60	105	140	110	100	79	140	10	32	6	22.5	20	12	100	1¼" B.S.P.
FT - 150	290	75	120	80	70	115	150	130	110	88	155	12	35	6	24.5	22	12	108	1½" B.S.P.
FT - 200	360	98	140	92	100	140	180	160	132	105	192	15	40	8	28	25	15	142	2" B.S.P.
FT - 250	420	110	175	110	120	155	200	185	145	114	215	18	45	8	31	28	15	160	2½" B.S.P.
FT - 300	457	100	195	105	155	175	220	225	165	130.5	241	20	50	10	35	32	15	190	3" B.S.P.

* All dimensions are in millimeters. Unless otherwise stated, Specifications are subject to change without prior notice as improvements are made from time to time.

CONVERSION FORMULA :

1 Imperial gallon = 4.5 Litres
1 Kg./Cm² = 14.2 p.s.i

1 U.S. Gallon = 3.785 Litres
1 Metre = 3.281 Feet

1 p.s.i = 2.31 Feet
1 H.P. = 0.75 Kw

Mfgd. by :



Fluid Tech Systems

Ahmedabad - 382 430. (Guj.) INDIA

Distributors :